
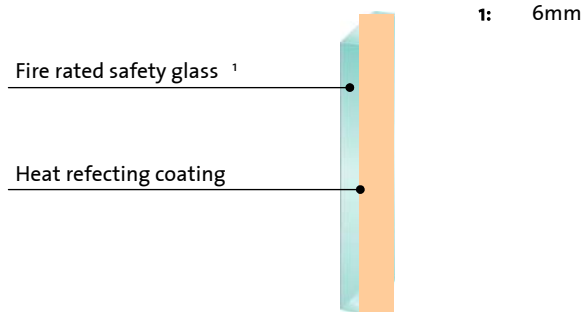


# SGG VETROFLAM<sup>®</sup> 60

Fire Resistant Safety Glass

Data Sheet

## SGG VETROFLAM 60 for interior and exterior application

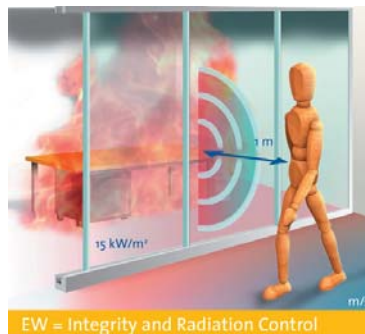

## Technical Data

Fire resistance classification	EW 60
Element thickness	6 mm
Minimum production size	200 x 300mm
Maximum production size	2000 x 4200mm
Max. tested size	Varying subject to make-up, frame system, element type and national approval certificates. For details please contact our sales office.
Length tolerance	± 2mm
Weight	15 kg / m <sup>2</sup>
Light transmission (EN 410)	76 %
Sound reduction $r_w$ (EN 140-3)	32 dB
UG value (EN 673)	3.8 W/m <sup>2</sup> K
Specific data for laminated safety glass and DGU make-ups on request.	