

## Fire Rated Framing System

### CLASSIFICATION




### PRODUCT DESCRIPTION

60 minute fire rated wall assembly with narrow profiles providing open vision areas allowing natural daylight without compromising life safety and design flexibility. This fully insulated system can be complemented with 45 or 60 minute rated doors where desired.

### TECHNICAL SPECIFICATIONS

Meets/Compliant	ASTM E 119, NFPA 251, NFPA 257, UL 263
Finish Option	Powder Coat/Enamel
Custom Colors <sup>1</sup>	Yes
Fabrication	Welded Units
Certification	Underwriters Laboratories
Fabricated in the US	Yes
Glazing Options	SGGCONTRAFLAM <sup>®</sup> 60; SGGCONTRAFLAM <sup>®</sup> STRUCTURE 60
Single/Double Doors	Yes (see VDS Doors)
Weight (lbs/lin.ft.)	6

### DETAILS

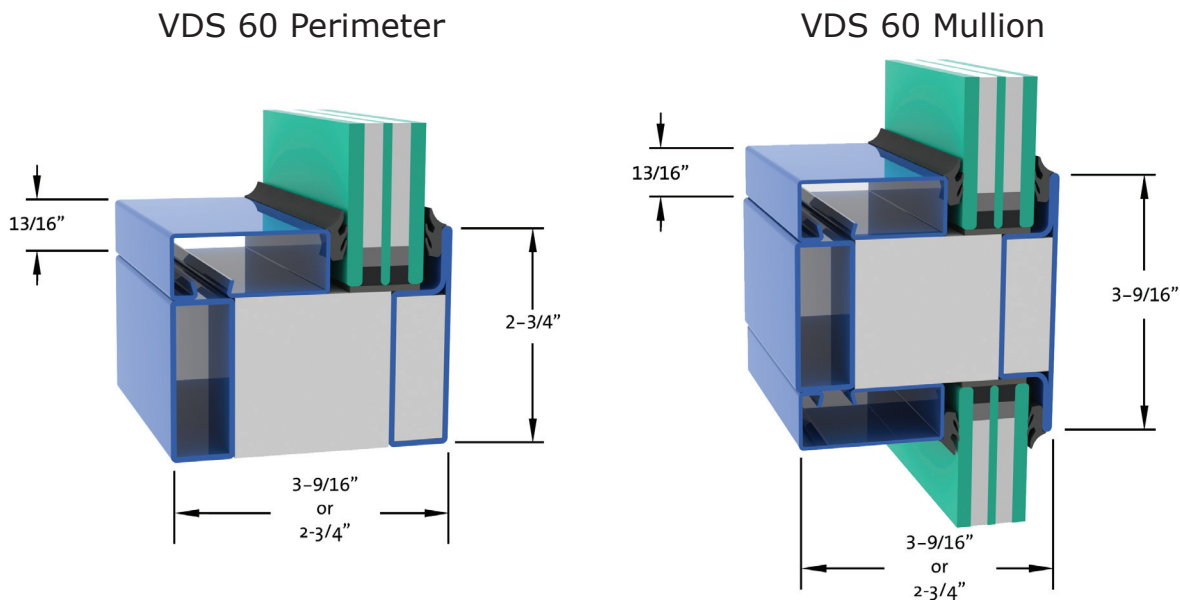

<sup>1</sup> Surcharge May Apply