

60 and 90 Minute Door Assemblies

CLASSIFICATION




PRODUCT DESCRIPTION

60 and 90 minute fire rated door assemblies with narrow stiles and rails providing maximum vision area. These complementary door assemblies complete our fully insulated VDS Systems where doors are desired.

TECHNICAL SPECIFICATIONS

Meets/Compliant	NFPA 80, NFPA 251, NFPA 252, UL 10B, UL 10C
Finish Option	Powder Coat/Enamel
Custom Colors ¹	Yes
Fabrication	Welded
Certification	Underwriters Laboratories
Fabricated in the US	Yes
Glazing Options	SGG SWISSFLAM [®] 45, SGG CONTRAFLAM [®] 60 & SGG CONTRAFLAM [®] 90
Single/Double Doors	Yes
Weight (lbs/lin.ft.)	7 (does not include glass or hardware)
Max Door Leaf Size	42" x 96"

DETAILS

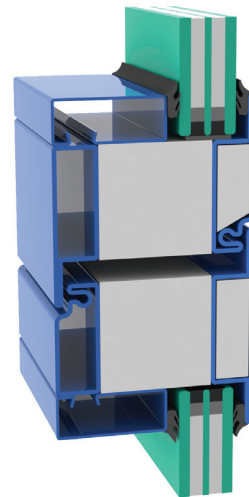

¹ Surcharge May Apply